




TYPE - 4B

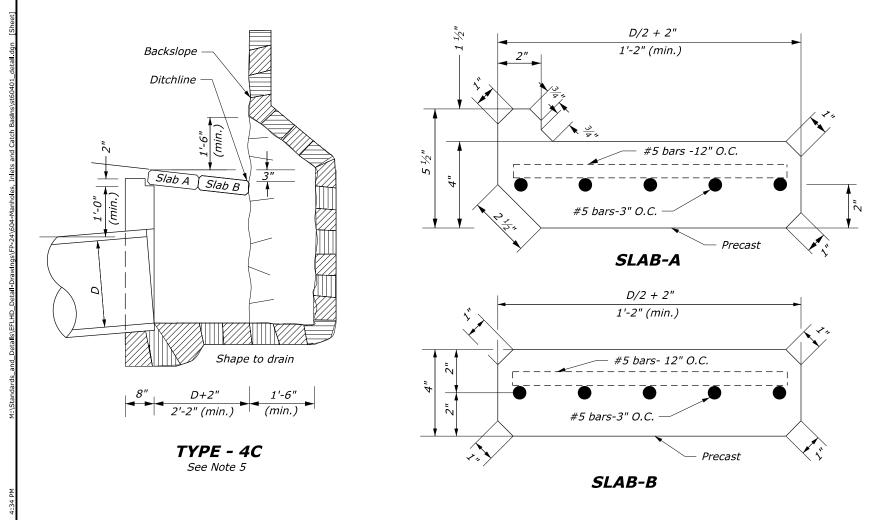

NOTES:

- 1. At the option of the Contractor, walls less than 4 feet in depth may be of either concrete block or concrete as shown.
- 2. Construct inlets parallel to the roadway centerline and grade. For pipes on skew, adjust inlets as directed.
- 3. Warp and widen ditch or paved waterways near inlets as directed, to facilitate drainage and to protect slopes at ends of inlets.
- 4. For payment purposes, one slab A plus one slab B or two slabs B constitute one concrete cover.
- 5. For inlet Type 4C in rock without backwall or floor, use same reinforcement as inlet Type 4A.

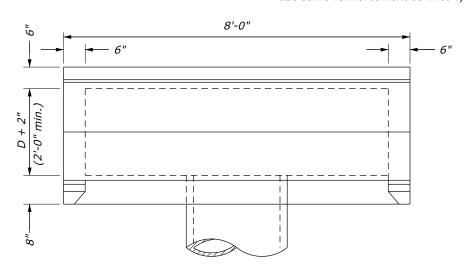

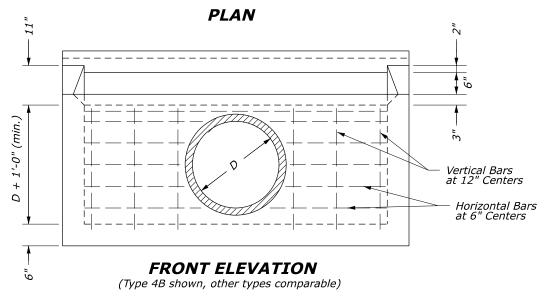

U.S. DEPARTMENT OF TRANSPORTATION, FHWA
OFFICE OF FEDERAL LANDS HIGHWAY

EFLHD DETAIL
E604-01

SPECIFICATION
FP-24, FP-14

APPROVED FOR USE
05/2024

NO SCALE