



NOTES:

1. Locate and set sign height according to the "Manual on Uniform Traffic Control Devices" (MUTCD), latest edition.
2. Use wood battens bolted to post at vertical spacings not to exceed 30 inches. See Detail E633-04.
3. Use double posts if W is over 3 feet.
4. For sign punching details, see the blank standards in the "Standard Highway Signs and Markings" as specified in the latest edition of the MUTCD.
5. Refer to Detail E633-01 for sign mounting details.

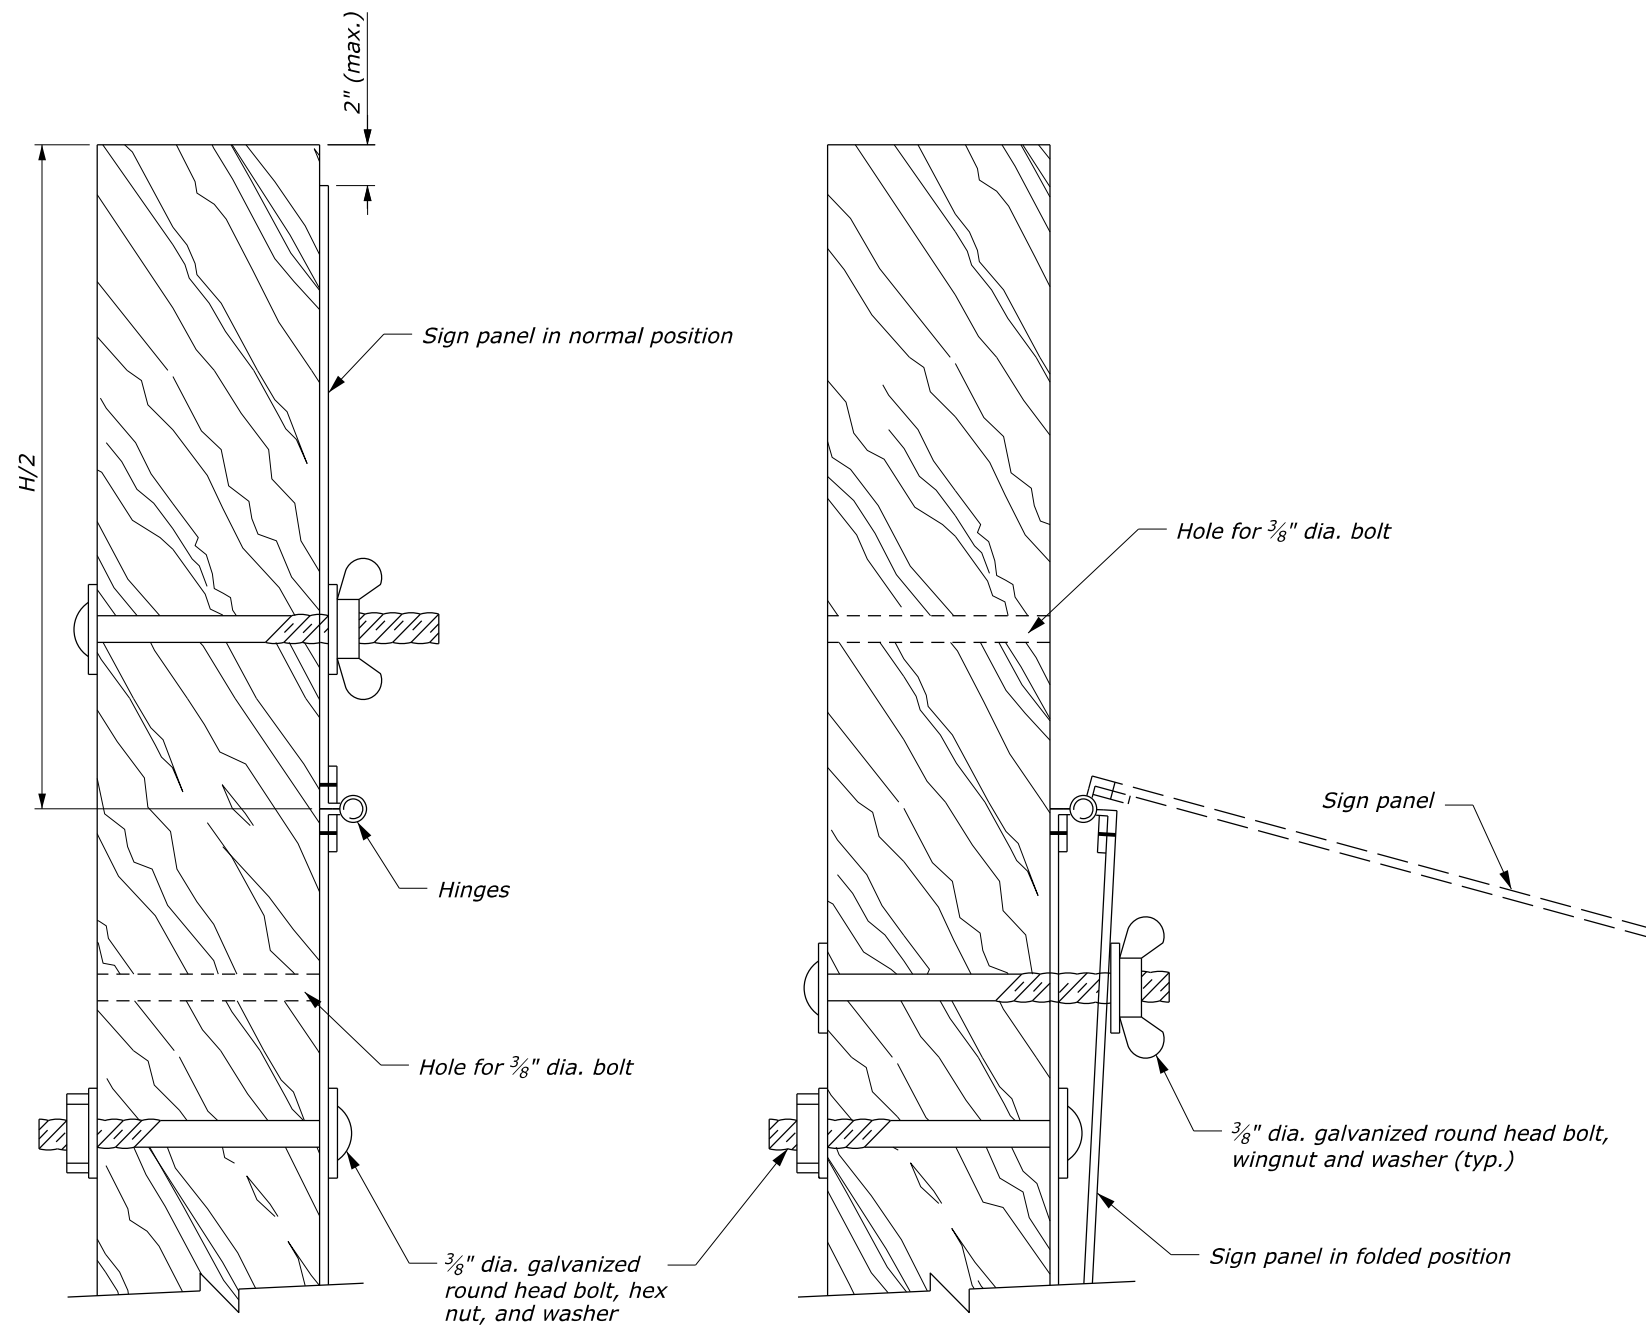

FASTENER

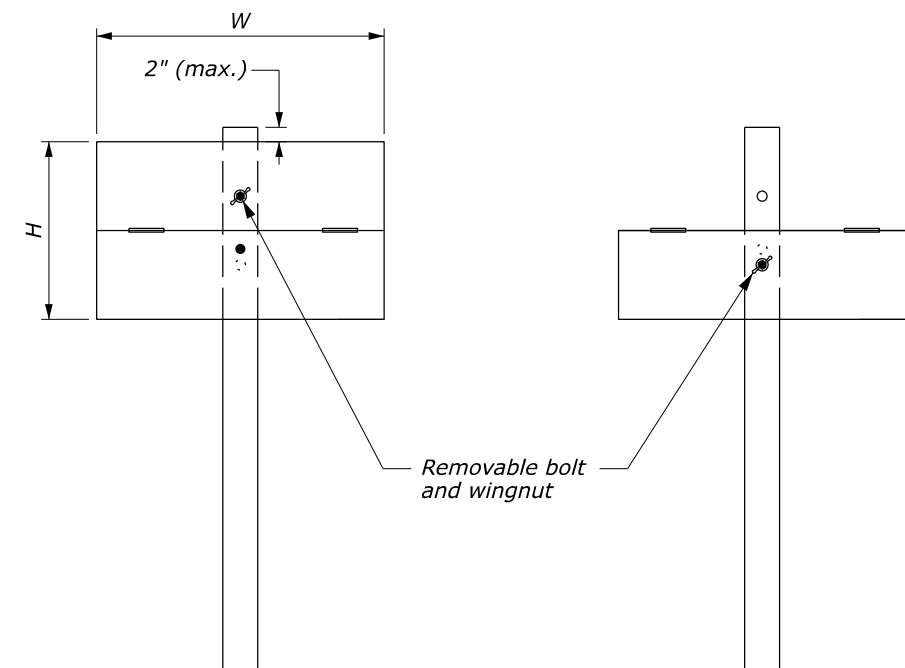

NORMAL SIGN POSITION

FOLDED SIGN POSITION

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	EFLHD DETAIL E633-05
FOLDING SIGN CONNECTIONS	SPECIFICATION FP-24, FP-14 APPROVED FOR USE 06/2024