


High-Performance Concrete Bridges- Texas San Angelo Bridge, U.S. Route 67, San Angelo

Publication No.: FHWA-RD-97-062

Month Year – N/A

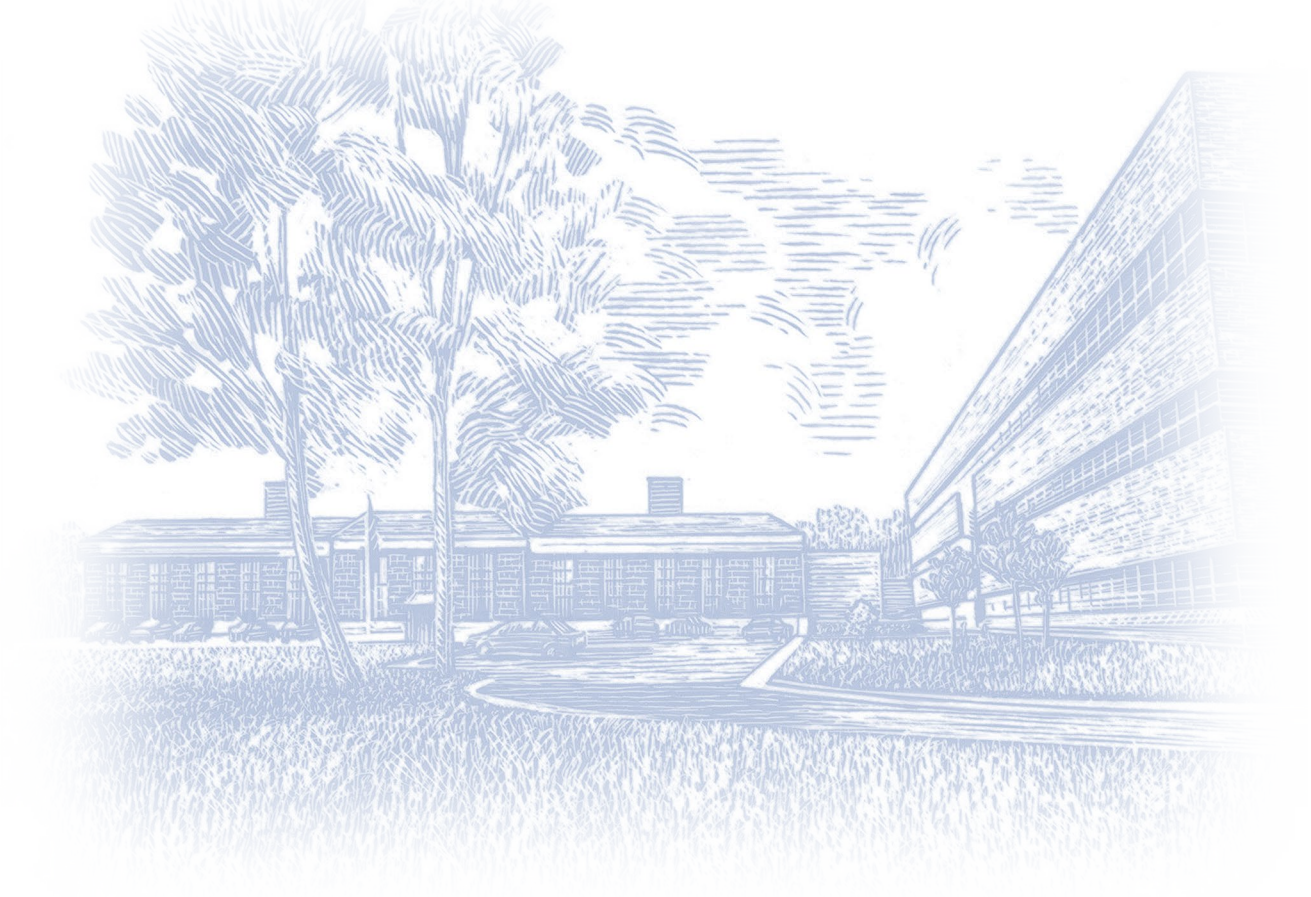

The original format of this document was an active HTML page(s). The Federal Highway Administration converted the HTML page(s) into an Adobe® Acrobat® PDF file to preserve and support reuse of the information it contained.

The intellectual content of this PDF is an authentic capture of the original HTML file. Hyperlinks and other functions of the HTML webpage may have been lost, and this version of the content may not fully work with screen reading software.

Foreword

High-Performance Concrete - Concrete with enhanced durability and strength characteristics. Under the Strategic Highway Research Program (SHRP), more than 40 concrete and structure products were developed. To implement the new technology of using High-Performance Concrete (HPC), the Federal Highway Administration (FHWA) has a program underway to showcase bridges constructed with HPC. The objective is to advance the use of HPC to achieve economy of construction and long-term performance.

General Description

The San Angelo Bridge, more formally known as the North Concho River, U.S. 87, and South Orient Railroad Overpass, consists of eastbound and westbound U.S. Route 67 main-lane bridges. The eastbound main-lane bridge is HPC. The westbound main-lanes use conventional concrete mixes, except for a high-performance/normal-strength concrete deck in five of the nine spans. The geometry of the crossing is such that the eastbound HPC beam spans vary from 19.4 m (63.8 ft) to 47.9 m (157 ft). The simple span AASHTO Type IV prestressed concrete I-beams are used in seven spans, and Texas Type B prestressed concrete I-beams are used in the short eighth span. The Texas Department of Transportation (TxDOT) is conducting the project in cooperation with the University of Texas at Austin.

Outline of HPC Features

Concrete strength of the bridge beams varied from 40 MPa (5,800 psi) to 102 MPa (14,800 psi) according to the demand of the particular application. The design strengths were specified at 28 days for the deck and piers. The design strength for the beams was specified at 56 days to account for the strength gain with time that is typical of many higher strength concretes. Strengths were:

Element	Compressive Strength
Beams @ Transfer	61-74 MPa (8,900 - 10,800 psi)
Beams @ 56 Days	40-101 MPa (5,800-14,700 psi)
Piers	41 MPa (6,000 psi)
Pier Cap	55 MPa (8,000 psi)
Deck	41 MPa (6,000 psi)
Subdeck Panels	41 MPa (6,000 psi)

To facilitate placement of the concrete in the I-beams, set retarder and high-range water-reducing admixtures were used. Accelerated curing was not used. Cement was partially replaced with fly ash in all mixes.

Pretensioned Beams

The AASHTO Type IV beams were 1372 mm (54 in) deep and were designed with straight pretensioned strands and draped post-tensioned strands. All strands are 15 mm (0.6 in) diameter. The pretensioned strands are space at 51 mm (2 in), and two ducts carry the draped post-tensioned strands. Transfer and development length tests were conducted in this project to obtain FHWA approval for use of the 15 mm (0.6 in) diameter pretensioned strands at 51 mm (2 in) spacing.

Piers

The substructure consists of a cast-in-place reinforced concrete single column with tapered cap. A window in each column complements openings in the superstructure's traffic railing.

Deck

The deck is composite cast-in-place reinforced concrete with precast, prestressed concrete subdeck panels. One task in this project is to accumulate field experience on the use of high-strength versus normal-strength high performance concrete in cast-in-place concrete deck construction. A reinforcing bar with a new pattern of deformations was also used. This bar was developed by the University of Kansas to

provide improved bond characteristics, and it replaces the standard reinforcement in the cast-in-place concrete decks of two spans.

Construction

Construction on this bridge began in June 1995. The project will be completed in 1997.

Benefits

The use of the high-strength characteristic of high-performance concrete in the beam design allowed a significant reduction in the number of beams and the reduction of one span. It is anticipated that the improved durability will result in reduced long-term maintenance costs and longer service life.

For further information on High-Performance Concrete or this project, contact:

FHWA Headquarters Contact: Susan Lane, 703/285-2111 (Fax 703/285-2766)
FHWA Region 6 Contact: Mike Fraher, 817/978-4380 (FAX 817/978-4144)
FHWA Texas Division Contact: Don Harley, 512/916-5526 (FAX 512/916-5881)
TxDOT Contact: Mary Lou Ralls, 512/465-7963 (FAX 512/465-7616)

