

# VIEW A

Single solid white striping (edge striping) 30' 4" wide broken white striping Double solid yellow striping (centerline)


### **BROKEN SINGLE WHITE AND DOUBLE SOLID YELLOW STRIPING**

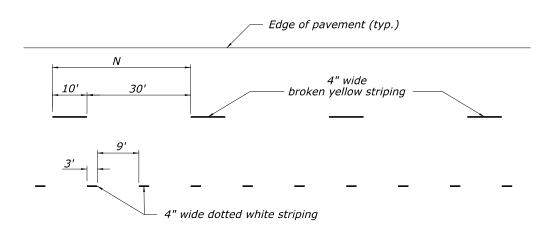


**BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING** 

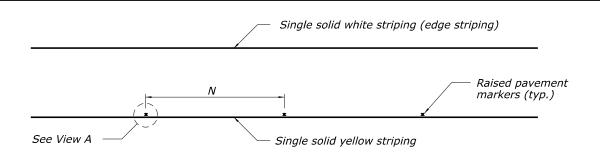

#### SINGLE SOLID YELLOW STRIPING WITH RAISED PAVEMENT MARKERS

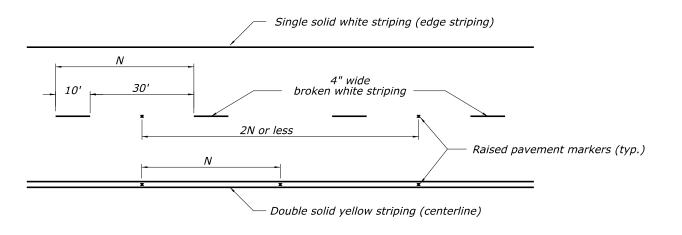

### **BROKEN SINGLE WHITE AND DOUBLE SOLID YELLOW STRIPING** WITH RAISED PAVEMENT MARKERS

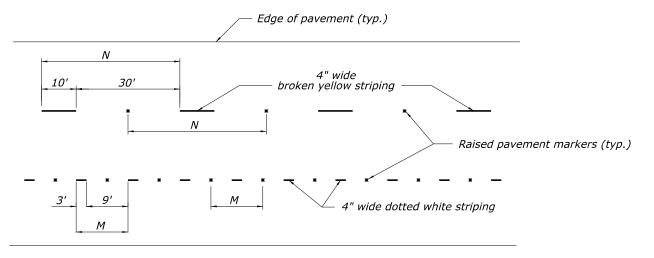

## **BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING** WITH RAISED PAVEMENT MARKERS

**PAVEMENT MARKINGS** WITH AND WITHOUT

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY

E634-03 SPECIFICATION FP-24, FP-14 APPROVED FOR USE

EFLHD DETAIL

06/2024

**RAISED PAVEMENT MARKERS** 

NOTES:

- 1. Install striping in accordance with the "Manual on Uniform Traffic Control Devices" (MUTCD), latest edition.
- 2. When raised pavement markers are required, space and install in accordance with the MUTCD and as shown in this Detail or as directed.

PROJECT

SHEET NUMBE

3. When raised pavement markers are required, see Detail E634-02.