SHEET NUMBE PROJECT

1. Mount signs that are wider than 3 feet

3. Submit alternate details for portable signs. Ensure sign mounts hold the sign

4. When parking is permitted within 200 feet of the sign, mount the sign a minimum of 7 feet above the pavement

5. When approved by the CO and the Utility Company, utility poles may be used for

6. For 4- by 6-inch and greater posts, see the Breakaway Sign Support View. If breakaway design cannot be used due to post spacing, place the sign outside the clearzone or shield with a barrier. Do not place holes in posts of non-breakaway signs.

7. Signs requiring 6- by 6-inch and greater posts are considered non-breakaway if multiple posts are required and the posts cannot be spaced a minimum of 7 feet

face in a vertical plane. Portable signs may be mounted lower than fixed signs


when approved. Ensure all portable sign

2. All lumber dimensions are nominal.

supports are crashworthy.

sign mounting.


or larger than 10 square feet on double

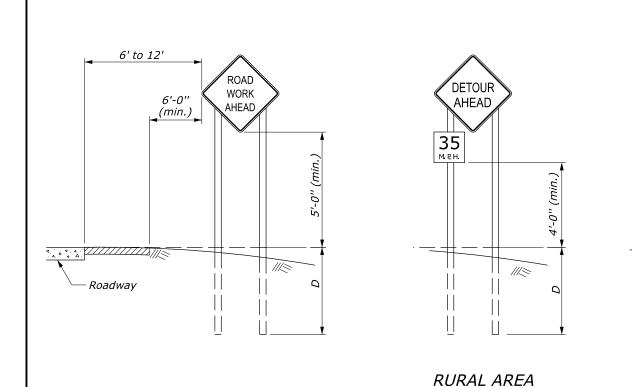

BREAKAWAY SIGN SUPPORT


(FIXED SIGNS 4" X 6" AND GREATER POSTS)

See Notes 6 and 7

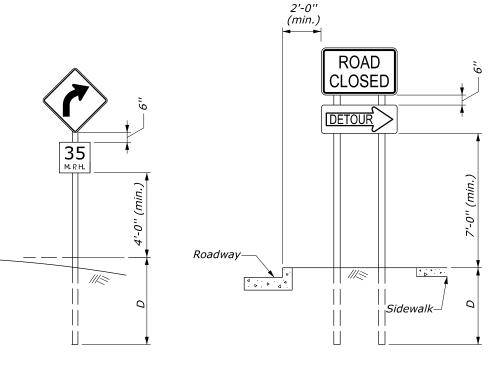

URBAN AREA

## FIXED ROADWAY SIGNS

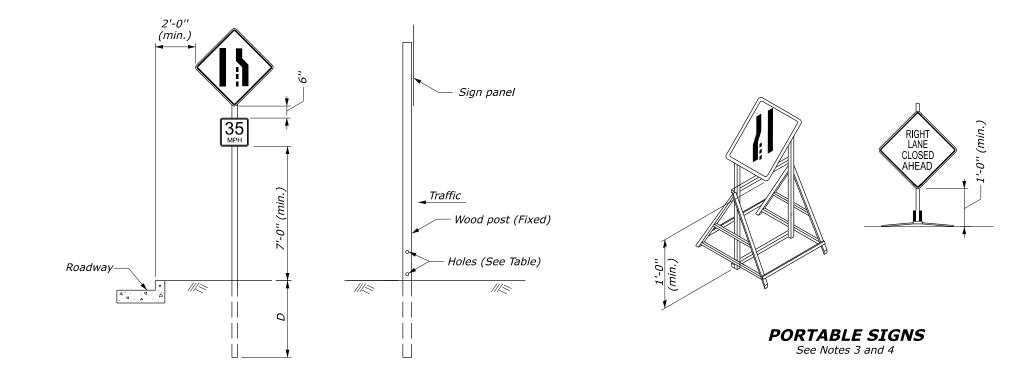

POST SIZE TABLE						
POST SIZE	D	HOLE DIAMETER	MAXIMUM SIGN AREA (SQFT)			
			1 Post	2 Post	3 Post	4 Post
4" x 4"	4'	None Required	10	20	> <	>
4" x 6"	4'	1.5"	> <	35	50	70
6" x 6"	5'	2"	> <	50	<i>75</i>	100
6" x 8"	5'	3"	$\geq <$	85	125	165

apart.

**NOTES:** 

TEMPORARY TRAFFIC CONTROL

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY EFLHD DETAIL E635-01 SPECIFICATION FP-24, FP-14 APPROVED FOR USE **SIGN MOUNTING** 06/2024