
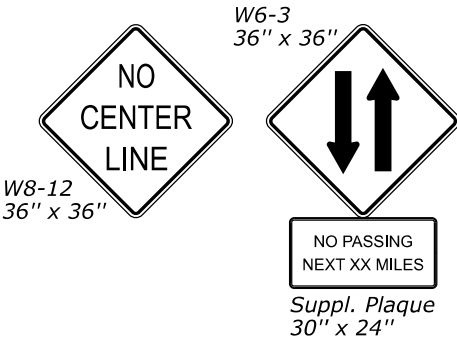



Bi-directional, yellow flexible pavement markers

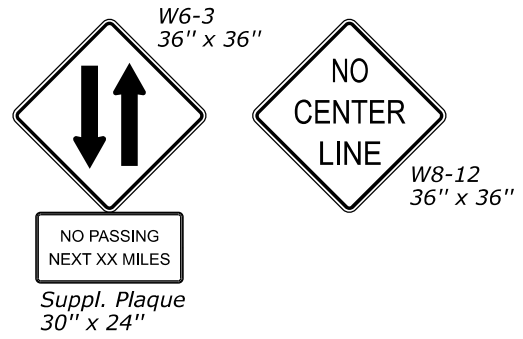

NOTES:

- For periods as noted in Table A, pavement may be unmarked if appropriate temporary pavement markers are provided as approved.
- Typical spacing between flexible pavement markers is 40 feet as shown. In areas of severe curvature, use a spacing of 20 feet. Areas of severe curvature are shown in the plans or provided in the Temporary Pavement Markings Schedule.
- See Subsection 718.16(b) for flexible pavement markers requirements.
- When ADT > 1000 and special hazards are present, supplement the R4-1 sign at the beginning of each no passing zone with a W14-3 sign mounted on the left side of the roadway.
- Repeat R4-1 sign at 3000-foot intervals minimum.

ADT	MAXIMUM DURATION BEFORE MARKINGS ARE REQUIRED
≤ 1000	14 Days
> 1000	3 Days

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	EFLHD DETAIL E635-14
FLEXIBLE PAVEMENT MARKERS FOR TEMPORARY USE WITH UNMARKED PAVEMENTS	SPECIFICATION FP-24, FP-14 APPROVED FOR USE 06/2024