


	PROJECT	SHEE
TE:		
cross slopes of ramps must no tion.	ot exceed 1.5% in	any
a coarse broom finish running ing slope to create a slip resis o surfaces, exclusive of the de	tant surface on c	oncrete
truct curb ramp perpendicula ing the ramp face.	r to the curb. Avo	id
truct ramp transitions betwee ts that are flush and free of a o exceed 0.25 inch.		
ide detectable warning surface d's Public Right-of-Way Acces		
te drainage inlets and manhol ing surfaces and landings.	les outside of ram	p
Detectable	//	
warning surfa	ce	
	X	
1:imax		
Flare	d sides	
Willie Marc		
$\mathbf{i}$		
/ 11		
P - ISOMETRIC		
U.S. DEPARTMENT OF TRANSPORTA		FLH STANDARD
OFFICE OF FEDERAL LANDS HI	GRWAY	610-1 SPECIFICATION
PERPENDICUL		FP-24
CURB RAME		APPROVED FOR USE 8/2024

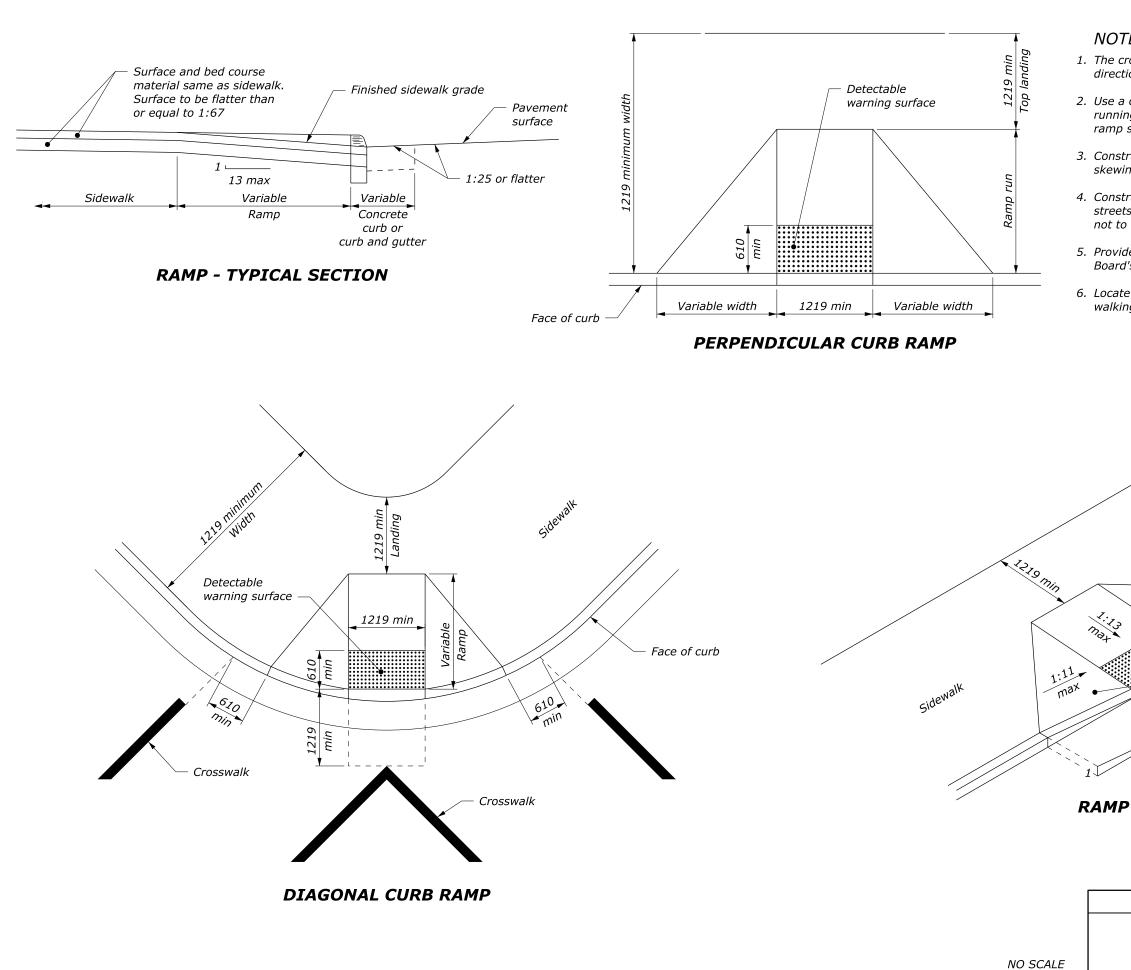

	PROJECT		SHEET
			NUMBER
TE:	·		
cross slopes of ramps must i tion.	not exceed 1.5%	in any	
a coarse broom finish runnin ing slope to create a slip res o surfaces, exclusive of the c	istant surface on	concrete	
struct curb ramp perpendicul ving the ramp face.	ar to the curb. A	void	
struct ramp transitions betwe ets that are flush and free of to exceed 6 mm.			
ide detectable warning surfa d's Public Right-of-Way Acce			
te drainage inlets and manh ing surfaces and landings.	oles outside of ra	mp	
Detectable	//		
warning sur	face		
	$\overline{\boldsymbol{\mathcal{A}}}$		
h linax			
Fla	red sides		
×.			
11			
P - ISOMETRIC			
This drawing contains <b>№</b> Dimensions without uni			
U.S. DEPARTMENT OF TRANSPORTA OFFICE OF FEDERAL LANDS HI		FLH STAN M61(	
PERPENDICUL	AR	SPECIFIC FP-2	
CURB RAME	•	APPROVED I 8/20	