


se cast-in-place corewall on curves with radius le 50 feet.	ess than
epth of aggregate base may be less than 6 inche hen the foundation is on either rock fill or solid r	
ee Typical Sections for guardwall offset distance evement structure.	and
et galvanized metal slots with anchors for the sto other approved type of metal anchors in the co uvivalent attachment systems are allowed with a	ncrete.
n 	
cing 66 N #5	
min. W1 BAR	
BENDING DIAGRAM	
se	
U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 620-1
	SPECIFICATION FP-24, FP-14 APPROVED FOR USE
(SINGLE FACE)	2/2024

1. Form construction joints in the corewall at 30-foot intervals or, at the option of the Contractor, construct the corewall of precast concrete units.

SHEET NUMBEI

PROJECT

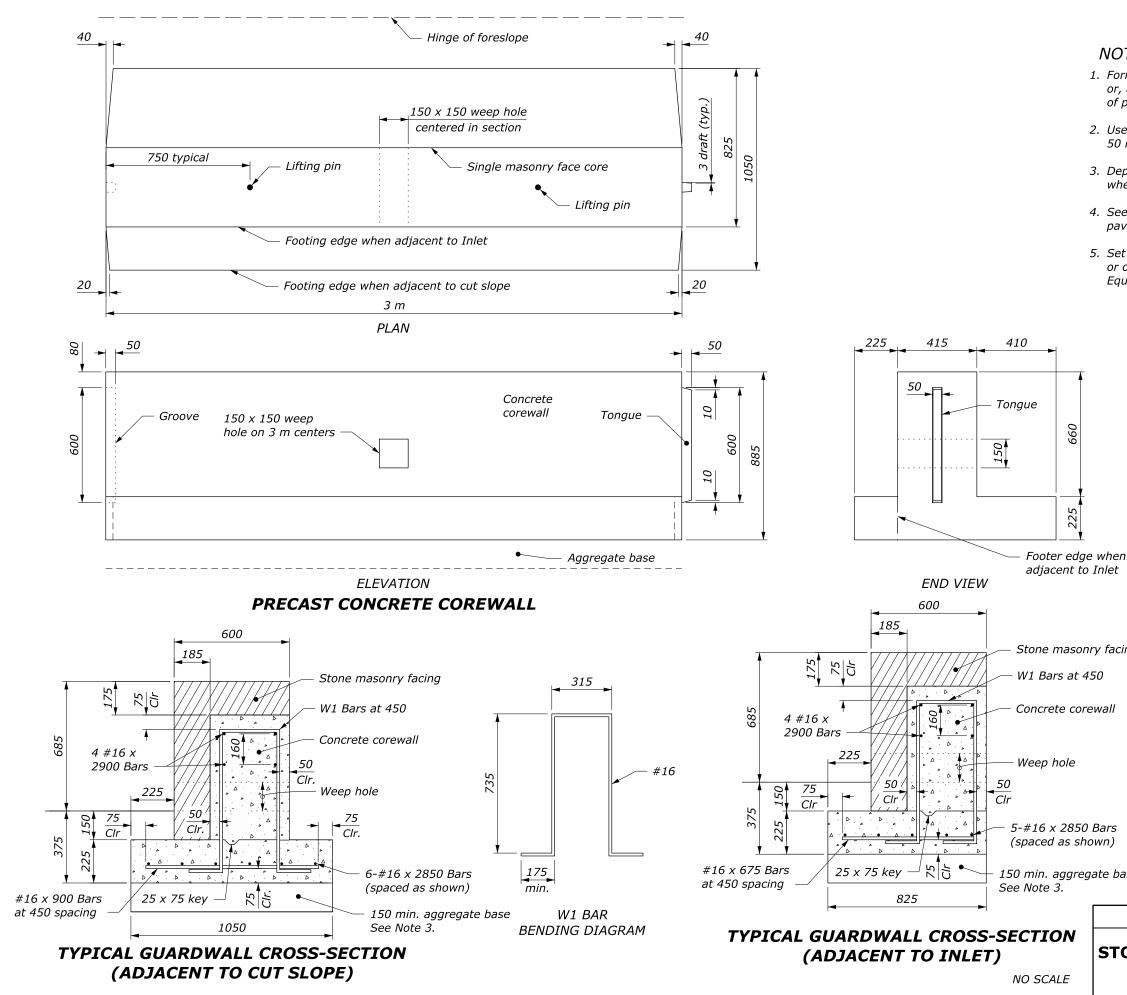

	PROJECT		SHEET
	PROJECT		UMBER
OTE:	L		
orm construction joints in the r, at the option of the Contrac f precast concrete units.			
'se cast-in-place corewall on c 0 m.	urves with radius	less than	
epth of aggregate base may L hen the foundation is on eithe			
ee Typical Sections for guardv avement structure.	vall offset distanc	e and	
et galvanized metal slots with r other approved type of meta quivalent attachment systems	al anchors in the o	concrete.	
en t 3	<u>815</u>		
cing SE K	#	16	
<u> </u>			
	BAR G DIAGRAM		
base This drawing contains N			
U.S. DEPARTMENT OF TRANSPORTA	TION, FHWA	FLH STAND	ARD
OFFICE OF FEDERAL LANDS HI		M620- SPECIFICAT	
ONE MASONRY GU (SINGLE FAC		FP-24, FF APPROVED FC 2/2024	P-14 DR USE