



U.S. Department
of Transportation
**Federal Highway
Administration**

March 15, 2024

1200 New Jersey Ave., SE
Washington, D.C. 20590

In Reply Refer To:
HSST-1/CC-178

Kevin Schrum
Sicking Safety Systems, LLC
101 Indian Trail Road, Indian Springs Village
AL 35124
USA

Dear Mr. Schrum:

We received your correspondence of February 14, 2023 requesting issuance of a reimbursement eligibility letter under the Federal-aid highway program for the roadside safety system, device, design, product, or hardware (collectively “device”) described below. This letter is assigned Federal Highway Administration (FHWA) control number CC-178.

ELIGIBILITY LETTERS

The FHWA issues Federal-aid reimbursement eligibility letters for new roadside safety devices that are crash tested in accordance with the industry standard of the American Association of State Highway and Transportation Officials (AASHTO) Manual for Assessing Safety Hardware (MASH).

FHWA, the Department of Transportation, and the United States (government) do not regulate roadside safety devices, crash test facilities, or the manufacturing industry. Issuance of eligibility letters is discretionary and provided only as a service to the states. FHWA may, at its discretion, decline to issue, revise, or rescind an eligibility letter. Eligibility letters are only issued by the FHWA headquarters Office of Safety.

Eligibility letters are issued only as notice to the states that a device is eligible for reimbursement under the Federal-aid highway program. They do not establish approval or certification for any other purpose. Issuance of an eligibility letter is not a prerequisite or requirement for state transportation agencies seeking to use Federal-aid funds for roadside safety devices. State agencies may use a device for which an eligibility letter has not been issued and seek Federal-aid reimbursement.

FEDERAL-AID REIMBURSEMENT

The request for issuance of this letter certified the device was crash tested in accordance with the industry standard of AASHTO’s MASH. This eligibility letter is based on that certification and the material offered in support of its issuance. The device described below is eligible for reimbursement under the Federal-aid highway program.

Name of system: Next Generation Terminal (NGT)
Type of system: Terminal
Test Level: Test Level 3
Testing conducted by: Applus IDIADA KARCO Engineering, LLC
Date of request: February 14, 2023

Information about the device, including material such as the eligibility request, crash test reports, drawings, or images are included in one or more attachment(s) to this letter.

Eligibility letter CC-178 is inapplicable to devices, optional equipment, alternate materials, or other features that were not crash tested in accordance with AASHTO's MASH.

This letter is issued only for the subject device as crash tested under AASHTO's MASH. Later modification(s) of the device are not eligible for Federal-aid reimbursement under this letter. Notice of later modification(s) should be given to transportation agencies, facility owners, and operators (collectively "agencies").

Agencies should be provided appropriate information about the device's design, installation, maintenance, materials, and mechanical properties.

Issuance of this letter is discretionary, and it may be revised or rescinded at FHWA's discretion. This letter is not a determination of compliance with the Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD) or ownership of any intellectual property rights.

This eligibility letter is not a determination by the government that a crash involving the subject device will result in any particular outcome. It is limited to only the device's eligibility for Federal-aid reimbursement.

INTELLECTUAL PROPERTY

Issuance of this eligibility letter does not convey property rights of any sort nor any exclusive privilege. This letter is not authorization or consent by the government for the use, manufacture, or sale of any patented or proprietary system, device, design, product, or hardware for which the requester is not the patent owner. Eligibility letters are not an expression of any view, position, or determination by the government as to the validity, scope, or ownership of any intellectual property rights to a specific device. These letters do not grant, impute, suggest, or otherwise establish any ownership, distribution, or licensing rights to the requester. The government expresses no opinion about the intellectual property rights relating to any device for which this or any other eligibility letter is issued.

PUBLIC DISCLOSURE

To prevent any misunderstanding, and as discussed above, this eligibility letter is assigned FHWA control number CC-178. It should only be reproduced in full with its attachment(s). This letter and the material offered by the requester supporting its issuance is public information. All eligibility letters and supporting material are subject to public disclosure under the Freedom

of Information Act (FOIA). Eligibility letters are available to the public at https://safety.fhwa.dot.gov/roadway_dept/countermeasures/reduce_crash_severity/.

If you have any questions, please contact Aimee Zhang at Aimee.Zhang@dot.gov.

Sincerely,

A handwritten signature in blue ink that reads "Amy S. Fox". The signature is fluid and cursive, with the first letters of each word being capitalized and prominent.

Amy S. Fox
Acting Director
Office of Safety Technologies
Office of Safety

Enclosures

Request for Federal Aid Reimbursement Eligibility of Highway Safety Hardware

Submitter	Date of Request:	February 14, 2023	<input checked="" type="radio"/> New <input type="radio"/> Resubmission
	Name:	Kevin Schrum	
	Company:	Sicking Safety Systems, LLC	
	Address:	101 Indian Trail Road, Indian Springs Village, AL 35124	
	Country:	United States of America	
To:	Michael S. Griffith, Director FHWA, Office of Safety Technologies		

I request the following devices be considered eligible for reimbursement under the Federal-aid highway program.

Device & Testing Criterion - Enter from right to left starting with Test Level

!-!-!

System Type	Submission Type	Device Name / Variant	Testing Criterion	Test Level
'CC': Crash Cushions, Attenuators, & Terminals	<input checked="" type="radio"/> Physical Crash Testing <input type="radio"/> Engineering Analysis	Next Generation Terminal (NGT™)	AASHTO MASH	TL3

By submitting this request for review and evaluation by the Federal Highway Administration, I certify that the product(s) was (were) tested in conformity with the AASHTO Manual for Assessing Safety Hardware and that the evaluation results meet the appropriate evaluation criteria in the MASH.

Individual or Organization responsible for the product:

Contact Name:	Kevin Schrum	Same as Submitter <input checked="" type="checkbox"/>
Company Name:	Sicking Safety Systems, LLC	Same as Submitter <input checked="" type="checkbox"/>
Address:	101 Indian Trail Road, Indian Springs Village, AL 35124	Same as Submitter <input checked="" type="checkbox"/>
Country:	United States of America	Same as Submitter <input checked="" type="checkbox"/>
Enter below all disclosures of financial interests as required by the FHWA 'Federal-Aid Reimbursement Eligibility Process for Safety Hardware Devices' document.		
Sicking Safety Systems, LLC is the manufacturer and marketer of device.		
Applus IDIADA KARCO Engineering, LLC (IDIADA KARCO) is an independent research and testing laboratory having no affiliation with any other entity. IDIADA KARCO is actively Involved In data acquisition and compliance/certification testing for a variety of government agencies and equipment manufacturers. The principals and staff of IDIADA KARCO have no past or present financial, contractual or organizational interest in any company or entity directly or indirectly related to the products that KARCO tests. If any financial interest should arise, other than receiving fees for testing, reporting, etc., with respect to any project, the company will provide, In writing, a full and immediate disclosure to the FHWA.		


PRODUCT DESCRIPTION

- New Hardware or Significant Modification
 Modification to Existing Hardware

The Next Generation Terminal (NGT™) is classified as a non-gating, re-directive terminal. The NGT™ has a total length of 37'-6" (11.4 m) from the center of the anchor post to the center of NGT post 10. The system consists of an impact head, anchor post assembly, first panel, shelf bracket, standard MGS 12.5' guardrail, two (2) notched wooden blockouts, seven (7) wooden blockouts, nine (9) 6' (1.8 m) NGT posts positioned at post 1 through 9, and one (1) 6' (1.8 m) long W6 x 9 post positioned at post 10. The impact head is attached directly to NGT post 1 with one (1) 5/16" x 1" Grade 5 hex bolt, two (2) 5/16" washers and one (1) 5/16" nut. A shelf bracket, where the impact head sits, is attached to NGT post 1 with two (2) 1/2" x 1 - 1/2" grade 5 hex bolts, four (4) 1/2" washers, and two (2) 1/2" hex nuts. The anchor post has a cap that is attached by two (2) 7/16" x 1-1/2" Grade 5 hex bolts, four (4) 7/16" washers, and two (2) 7/16" hex nuts. The first panel's cable is inserted into the anchor post and held in place by the anchor cap, one (1) 1" hex nut, and one (1) 1" washer. The guardrail splice was connected by eight (8) 5/8" x 1-1/4" splice bolts and eight (8) 5/8" splice nuts.

CRASH TESTING

By signature below, the Engineer affiliated with the testing laboratory, agrees in support of this submission that all of the critical and relevant crash tests for this device listed above were conducted to meet the MASH test criteria. The Engineer has determined that no other crash tests are necessary to determine the device meets the MASH criteria.

Engineer Name:	Alex Beltran	
Engineer Signature:		Digitally signed by Alex Beltran DN: cn=Alex Beltran, o=IDIADA KARCO, ou=Lab, email=Alex.Beltran@idiada.com, c=US Date: 2023.11.14 12:23:33 -08'00'
Address:	9270 Holly Road, Adelanto, CA 92301	Same as Submitter <input type="checkbox"/>
Country:	United States of America	Same as Submitter <input checked="" type="checkbox"/>

A brief description of each crash test and its result:


Required Test Number	Narrative Description	Evaluation Results
3-30 (1100C)	<p>Applus IDIADA KARCO Test No. P42215-01. Test Date September 16, 2022. Crash Test Report No. TR-P42215-01-NC for MASH 2016 Test 3-30 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2016 Kia Rio small sedan at a velocity of 66.48 mph (106.99 km/h) and a CIA of 1.0°. Upon impact the impact head captured the test vehicle and they began retracting downstream along the first panel. NGT posts 1 through 5 sheared at the plug welds, as intended. The test vehicle released from the impact head and began yawing in a counterclockwise direction as it proceeded to its final resting position. MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 24.9 ft/s (7.6 m/s) and a maximum ridedown acceleration (RA) of -10.8 g.</p>	PASS
3-31 (2270P)	<p>Applus IDIADA KARCO Test No. P42214-01. Test Date September 23, 2022. Crash Test Report No. TR-P42214-01-NC for MASH 2016 Test 3-31 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2017 Ram 1500 pickup truck at a velocity of 62.11 mph (99.96 km/h) and a CIA of 0.3°. Upon impact the vehicle contacted the impact head. NGT posts 1 through 8 sheared at the plug welds, as intended, and posts 9 through 11 partially yielded. The pickup truck remained in contact with system. MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 17.4 ft/s (5.3 m/s) and a maximum ridedown acceleration (RA) of -6.8 g.</p>	PASS

Required Test Number	Narrative Description	Evaluation Results
3-32 (1100C)	<p>Applus IDIADA KARCO Test No. P42191-01. Test Date September 02, 2022. Crash Test Report No. TR-P42191-01-NC for MASH 2016 Test 3-32 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2016 Kia Rio small sedan at a velocity of 61.82 mph (99.49 km/h) and a CIA of 14.9°. Upon impact the impact head captured the test vehicle and began retracting downstream. NGT plug welded posts 1 through 4 yielded flat to grade. As the retracting continued the test vehicle began to yaw in a clockwise direction. The vehicle lost contact with the impact head and continued yawing until reaching its final resting position downstream. MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 30.8 ft/s (9.4 m/s) and a maximum ridedown acceleration (RA) of -9.7 g.</p>	PASS
3-33 (2270P)	<p>Applus IDIADA KARCO Test No. P42104-03. Test Date July 13, 2022. Crash Test Report No. TR-P42104-03-NC for MASH 2016 Test 3-33 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2016 Ram 1500 pickup truck at a velocity of 61.86 mph (99.56 km/h) and a CIA of 14.5°. Upon impact the pickup truck was captured by the impact head. NGT plug-welded posts 1 through 8 yielded flat to grade as the vehicle and impact head began retracting downstream. After the retraction was complete the vehicle released from the system and began to yaw in a clockwise direction until reaching its final resting position. There was 1.0 in. (25 mm) of deformation to the floorpan/transmission tunnel but MASH 2016 deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 22.3 ft/s (6.8 m/s) and a maximum ridedown acceleration (RA) of -5.8 g.</p>	PASS

3-34 (1100C)	<p>Applus IDIADA KARCO Test No. P42158-01. Test Date July 22, 2022. Crash Test Report No. TR-P42158-01-NC for MASH 2016 Test 3-34 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2016 Kia Rio small sedan at a velocity of 60.84 mph (97.91 km/h) and a CIA of 15.4°. Upon impact the vehicle contacted the impact head. NGT first post remained intact, but NGT plug-welded posts 2 and 3 partially yielded. The small sedan remained in contact with the system, was redirected, and proceeded downstream to its final resting position. MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of -18.04 ft/s (-5.5 m/s) and a maximum ridedown acceleration (RA) of -8.3 g.</p>	PASS
3-35 (2270P)	<p>Applus IDIADA KARCO Test No. P42095-01. Test Date May 03, 2022. Crash Test Report No. TR-P42095-01-NC for MASH 2016 Test 3-35 Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™).</p> <p>The terminal was impacted by a 2016 Ram 1500 pickup truck at a velocity of 61.45 mph (98.89 km/h) and a CIA of 26.4°. Upon impact NGT posts 3 through 9 yielded flat to grade and the vehicle began redirecting. The truck then continued downstream until reaching its final resting position. MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 18.0 ft/s (5.5 m/s) and a maximum ridedown acceleration (RA) of -12.2 g.</p>	PASS
3-36 (2270P)	Test 3-36 is intended for a system that had a rigid backup structure and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted

3-37 (2270P)	<p>Applus IDIADA KARCO Test No. P42183-01. Test Date August 05, 2022. Crash Test Report No. TR-P42183-01-NC for MASH 2016 Test 3-37b Crash Test of Sicking Safety Systems, LLC Next Generation Terminal (NGT™). MASH Test 3-37b involves a 1100C or 2270P vehicle impacting the CIP of the terminal / crash cushion at a nominal velocity of 62 mph (100 km/h) and impact angle of 25° in the reverse direction of travel. The NGT™ is classified as a post-and-beam terminal to which MASH states that the 1100C vehicle will generally be the critical vehicle for this test. As such, the NGT™ was tested to Test 3-37b with an 1100C vehicle.</p> <p>The terminal was impacted by a 2016 Kia Rio small sedan at a velocity of 62.74 mph (100.97 km/h) and a CIA of 24.9°. Upon impact the vehicle contacted the first panel causing NGT plug welded posts 2 and 3 to yield. The vehicle then contacted the impact head and caused the NGT first post to yield. The impact head detached from the first post and the first panel then the vehicle proceeded to its final resting position. There was 1.0 in. (30 mm) of deformation to the windshield but MASH deformation limits were not exceeded and there was no penetration into the vehicle's occupant compartment. The vehicle experienced a maximum occupant impact velocity (OIV) of 28.2 ft/s (8.6 m/s) and a maximum ridedown acceleration (RA) of -14.8 g.</p>	PASS
3-38 (1500A)	Test 3-38 is intended for a staged attenuation system and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-40 (1100C)	Test 3-40 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-41 (2270P)	Test 3-41 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-42 (1100C)	Test 3-42 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-43 (2270P)	Test 3-43 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-44 (2270P)	Test 3-44 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted
3-45 (1500A)	Test 3-45 is intended for non-redirective crash cushions and is not applicable for this system, therefore it was not performed.	Non-Relevant Test, not conducted

Full Scale Crash Testing was done in compliance with MASH by the following accredited crash test laboratory (cite the laboratory's accreditation status as noted in the crash test reports.):

Laboratory Name:	Applus IDIADA KARCO Engineering, LLC.	
Laboratory Signature:	 <small>Digitally signed by Alex Beltran DN: cn=Alex Beltran, o=IDIADA KARCO, ou=Lab, email=Alex.Beltran@idiada.com, c=US Date: 2023.11.14 15:52:15 -08'00'</small>	
Address:	9270 Holly Road, Adelanto, CA 92301	Same as Submitter <input type="checkbox"/>
Country:	United States of America	Same as Submitter <input checked="" type="checkbox"/>
Accreditation Certificate Number and Dates of current Accreditation period :	International Accreditation Services (IAS) ISO 17025 Accreditation Certificate #TL-371 Expires April 27, 2024	

Submitter Signature*: Kevin Schrum Digitally signed by Kevin Schrum
Date: 2023.11.14 18:19:10 -06'00'

Submit Form

ATTACHMENTS

Attach to this form:

- 1) Additional disclosures of related financial interest as indicated above.
- 2) A copy of the full test report, video, and a Test Data Summary Sheet for each test conducted in support of this request.
- 3) A drawing or drawings of the device(s) that conform to the Task Force-13 Drawing Specifications [[Hardware Guide Drawing Standards](#)]. For proprietary products, a single isometric line drawing is usually acceptable to illustrate the product, with detailed specifications, intended use, and contact information provided on the reverse. Additional drawings (not in TF-13 format) showing details that are relevant to understanding the dimensions and performance of the device should also be submitted to facilitate our review.

FHWA Official Business Only:

Eligibility Letter		
Number	Date	Key Words

MASH 2016 Test 3-30 Summary




0.000 seconds

0.180 seconds

0.360 seconds

0.630 seconds

0.810 seconds

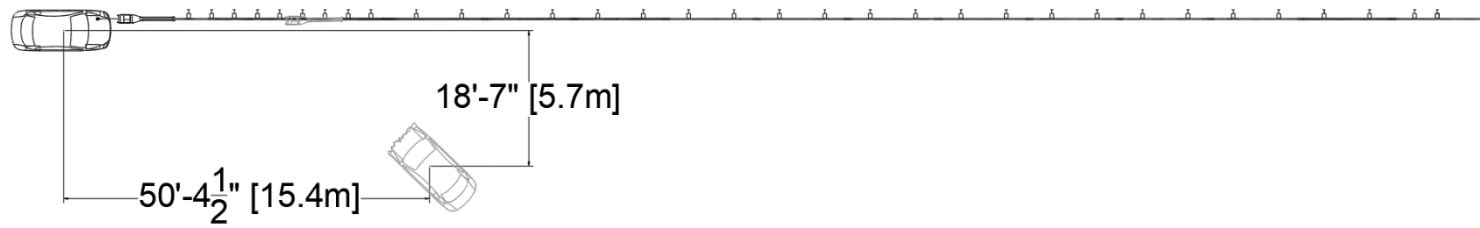

GENERAL INFORMATION

Test Agency..... Applus IDIADA KARCO
 Test Number..... P42215-01
 Test Designation..... 3-30
 Test Date..... 9/16/22

TEST ARTICLE

Name / Model..... Next Generation Terminal (NGT™)
 Type..... Terminal
 Installation Length..... 187.5 ft. (57.2 m)
 Terminal Length..... 37.5 ft. (11.4 m)
 Road Surface..... Smooth Concrete to Fine Silty Soil

TEST VEHICLE

Type / Designation..... 1100C
 Year, Make, and Model.... 2016 Kia Rio
 Curb Mass..... 2,422.8 lbs (1,099.0 kg)
 Test Inertial Mass..... 2,440.5 lbs (1,107.0 kg)
 Gross Static Mass..... 2,615.7 lbs (1,186.5 kg)

Impact Conditions

Impact Velocity..... 66.48 mph (106.99 km/h)
 Impact Angle..... 1.0°
 Location / Orientation..... 18.3 in. (465 mm) From Vehicle Centerline to Driver Side
 Kinetic Energy..... 360.6 kip-feet (488.9 Kilojoules)
 Minimum KE Required..... 288.0 kip-feet (390.0 Kilojoules)

Exit Conditions

Exit Velocity..... 12.86 mph (20.70 km/h)
 Exit Angle..... -76.8°
 Final Vehicle Position..... 50.4 ft. (15.4 m) Downstream
 18.6 ft. (5.7 m) Toward the Impact Side
 Vehicle Snagging..... Satisfactory
 Vehicle Pocketing..... Satisfactory
 Vehicle Stability..... Satisfactory
 Maximum Roll Angle..... -14.6°
 Maximum Pitch Angle..... 7.9°
 Maximum Yaw Angle..... -170.9°

Occupant Risk

Longitudinal OIV..... 24.9 ft/s (7.6 m/s)
 Lateral OIV..... -2.3 ft/s (-0.7 m/s)
 Longitudinal RA..... -10.8 g
 Lateral RA..... -3.4 g
 THIV..... 24.9 ft/s (7.6 m/s)
 PHD..... 10.8 g
 ASI..... 0.76

Test Article Deflections


Static..... Not Applicable
 Dynamic..... Not Applicable
 Working Width..... Not Applicable
 Debris Field..... 52.5 ft. (16.0 m) Longitudinally
 38.7 ft. (11.8 m) Laterally

Vehicle Damage

Vehicle Damage Scale..... 12-FYEW-2
 CDC..... 12-FL-3
 Maximum Deformation.... MASH Deformation Limits Not Exceeded (0.0 in.) 0.0 mm

Figure 2 Summary of Test 3-30

MASH 2016 Test 3-31 Summary

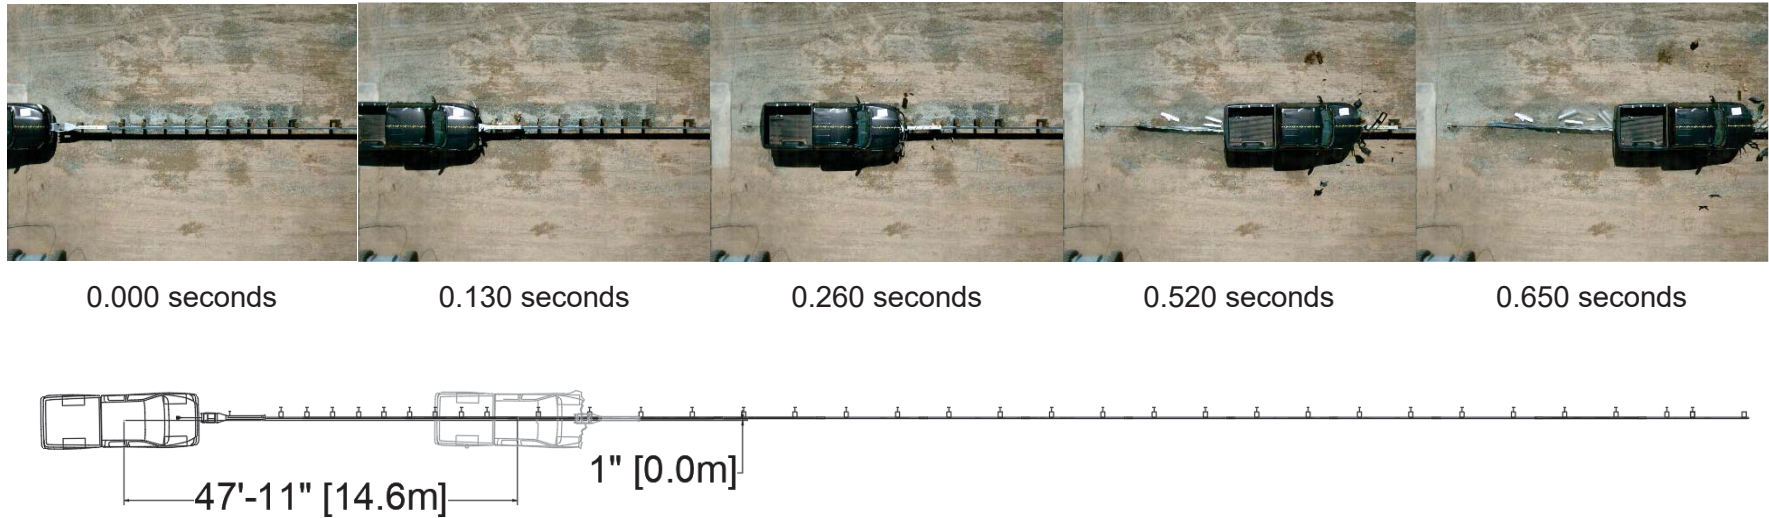

<p>GENERAL INFORMATION</p> <p>Test Agency..... Applus IDIADA KARCO Test Number..... P42214-01 Test Designation..... 3-31 Test Date..... 9/23/22</p> <p>TEST ARTICLE</p> <p>Name / Model..... NGT™ Type..... Terminal Installation Length..... 187.5 ft. (57.2 m) Terminal Length..... 37.5 ft. (11.4 m) Road Surface..... Smooth Concrete to Fine Silty Soil</p> <p>TEST VEHICLE</p> <p>Type / Designation..... 2270P Year, Make, and Model.... 2017 Ram 1500 Curb Mass..... 4,995.6 lbs (2,266.0 kg) Test Inertial Mass..... 5,006.6 lbs (2,271.0 kg) Gross Static Mass..... 5,006.6 lbs (2,271.0 kg)</p>	<p>Impact Conditions</p> <p>Impact Velocity..... 62.11 mph (99.96 km/h) Impact Angle..... 0.3° Location / Orientation..... 0.79 in. (20 mm) From Vehicle Centerline on Passenger Side</p> <p>Kinetic Energy..... 645.7 kip-feet (875.5 Kilojoules) Minimum KE Required..... 594.0 kip-feet (806.0 Kilojoules)</p> <p>Exit Conditions</p> <p>Exit Velocity..... Not Applicable Exit Angle..... Not Applicable Final Vehicle Position..... 47.9 ft. (14.6 m) Downstream 0.1 ft. (0.0 m) Toward the Impact Side</p> <p>Vehicle Snagging..... Satisfactory Vehicle Pocketing..... Satisfactory Vehicle Stability..... Satisfactory Maximum Roll Angle..... 1.7° Maximum Pitch Angle..... 2.9° Maximum Yaw Angle..... -1.2°</p>	<p>Occupant Risk</p> <p>Longitudinal OIV..... 17.4 ft/s (5.3 m/s) Lateral OIV..... 1.3 ft/s (0.4 m/s) Longitudinal RA..... - 6.8 g Lateral RA..... 1.6 g THIV..... 17.4 ft/s (5.3 m/s) PHD..... 6.8 g ASI..... 0.53</p> <p>Test Article Deflections</p> <p>Static..... Not Applicable Dynamic..... Not Applicable Working Width..... Not Applicable Debris Field..... 72.3 ft. (22.0 m) Longitudinally 20.3 ft. (6.2 m) Laterally</p> <p>Vehicle Damage</p> <p>Vehicle Damage Scale..... 12-FC-3 CDC..... 12FCEN2 Maximum Deformation.... MASH Deformation Limits Not Exceeded (0.0 in.) 0 mm</p>
--	--	---

Figure 4 Summary of Test 3-31

MASH 2016 Test 3-32 Summary




0.000 seconds

0.200 seconds

0.300 seconds

0.600 seconds

0.700 seconds

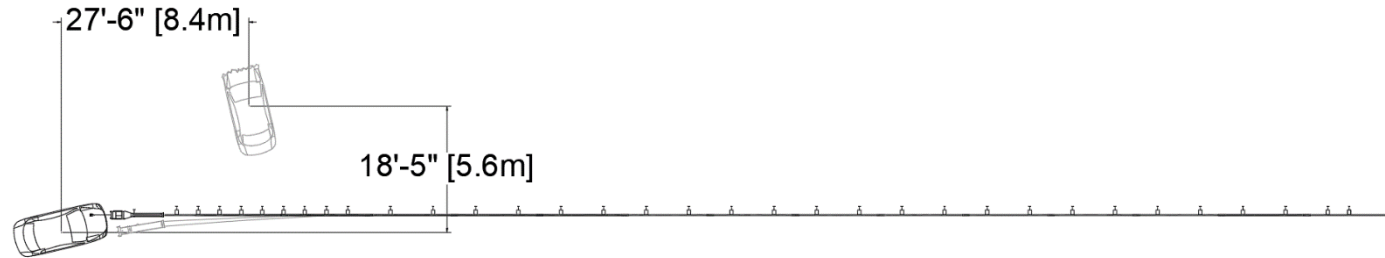

GENERAL INFORMATION

Test Agency..... Applus IDIADA KARCO
 Test Number..... P42191-01
 Test Designation..... 3-32
 Test Date..... 9/2/22

TEST ARTICLE

Name / Model..... Next Generation Terminal (NGT™)
 Type..... Terminal
 Installation Length..... 187.5 ft. (57.2 m)
 Terminal Length..... 37.5 ft. (11.4 m)
 Road Surface..... Smooth Concrete to Fine Silty Soil

TEST VEHICLE

Type / Designation..... 1100C
 Year, Make, and Model.... 2016 Kia Rio
 Curb Mass..... 2,555.1 lbs (1,159.0 kg)
 Test Inertial Mass..... 2,466.9 lbs (1,119.0 kg)
 Gross Static Mass..... 2,635.6 lbs (1,195.5 kg)

Impact Conditions

Impact Velocity..... 61.82 mph (99.49 km/h)
 Impact Angle..... 14.9°
 Location / Orientation..... 1.0 in. (25 mm) From Vehicle
 Centerline on Passenger Side
 Kinetic Energy..... 315.2 kip-feet (427.3 Kilojoules)
 Minimum KE Required..... 288.0 kip-feet (390.0 Kilojoules)

Exit Conditions

Exit Velocity..... 5.90 mph (9.50 km/h)
 Exit Angle..... 81.3°
 Final Vehicle Position..... 27.5 ft. (8.4 m) Downstream
 18.4 ft. (5.6 m) Field Side
 Vehicle Snagging..... Satisfactory
 Vehicle Pocketing..... Satisfactory
 Vehicle Stability..... Satisfactory
 Maximum Roll Angle..... -18.1°
 Maximum Pitch Angle..... -17.8°
 Maximum Yaw Angle..... 231.4°

Occupant Risk

Longitudinal OIV..... 30.8 ft/s (9.4 m/s)
 Lateral OIV..... -3.9 ft/s (-1.2 m/s)
 Longitudinal RA..... -9.7 g
 Lateral RA..... 4.1 g
 THIV..... 31.5 ft/s (9.6 m/s)
 PHD..... 9.8 g
 ASI..... 0.86

Test Article Deflections


Static..... 1.4 ft. (0.4 m)
 Dynamic..... 2.1 ft. (0.6 m)
 Working Width..... 2.4 ft. (0.7 m)
 Debris Field..... 90.2 ft. (27.5 m) Longitudinally
 6.3 ft. (1.9 m) Laterally

Vehicle Damage

Vehicle Damage Scale..... 12-FD-6
 CDC..... 12FD-6W3
 Maximum Deformation.... MASH Deformation Limits Not Exceeded (0.0 in.) 0 mm

Figure 2 Summary of Test 3-32

MASH 2016 Test 3-33 Summary

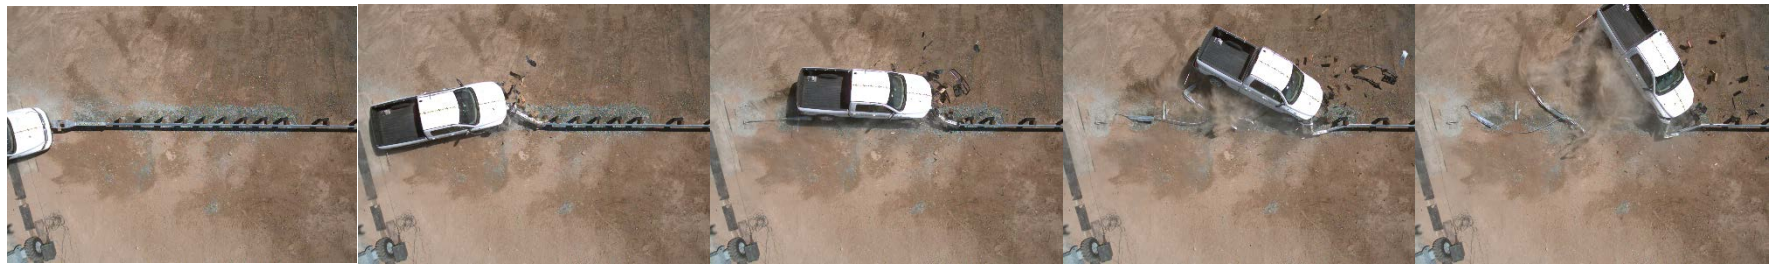


0.000 seconds

0.200 seconds

0.400 seconds

0.600 seconds


0.800 seconds

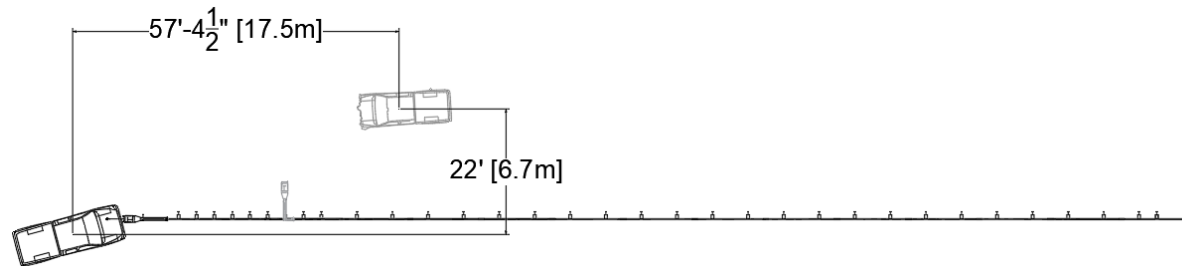

GENERAL INFORMATION		Impact Conditions		Occupant Risk	
Test Agency.....	Applus IDIADA KARCO	Impact Velocity.....	61.86 mph (99.56 km/h)	Longitudinal OIV.....	22.3 ft/s (6.8 m/s)
Test Number.....	P42104-03	Impact Angle.....	14.5°	Lateral OIV.....	-2.0 ft/s (-0.6 m/s)
Test Designation.....	3-33	Location / Orientation.....	0.7 in. (18 mm) Passenger Side of Vehicle Centerline	Longitudinal RA.....	-5.8 g
Test Date.....	7/13/22	Kinematic Energy.....	641.0 kip-feet (869.0 Kilojoules)	Lateral RA.....	2.9 g
		Minimum KE Required.....	594.0 kip-feet (806.0 Kilojoules)	THIV.....	22.6 ft/s (6.9 m/s)
TEST ARTICLE		Exit Conditions		PHD.....	6.0 g
Name / Model.....	Next Generation Terminal (NGT™)	Exit Velocity.....	9.6 mph (15.4 km/h)	ASI.....	0.42
Type.....	Terminal	Exit Angle.....	68.6°	Test Article Deflections	
Installation Length.....	187.5 ft. (57.2 m)	Final Vehicle Position.....	57.4 ft. (17.5 m) Downstream 22.0 ft. (6.7 m) Non-Impact side	Static.....	4.1 ft. (1.2 m)
Terminal Length.....	37.5 ft. (11.4 m)	Vehicle Snagging.....	Satisfactory	Dynamic.....	3.5 ft. (1.1 m)
Road Surface.....	Smooth Concrete to Fine Silty Soil	Vehicle Pocketing.....	Satisfactory	Working Width.....	4.3 ft. (1.3 m)
TEST VEHICLE		Vehicle Stability.....	Satisfactory	Debris Field.....	82.3 ft. (25.1 m) Longitudinally 42.2 ft. (12.9 m) Laterally
Type / Designation.....	2270P	Maximum Roll Angle.....	-17.2°	Vehicle Damage	
Year, Make, and Model....	2016 Ram 1500	Maximum Pitch Angle.....	-11.5°	Vehicle Damage Scale.....	12-FD-5
Curb Mass.....	5,136.7 lbs (2,330.0 kg)	Maximum Yaw Angle.....	22.8°	CDC.....	12FDEW2
Test Inertial Mass.....	5,009.9 lbs (2,272.5 kg)			Maximum Deformation....	1.0 in. (25 mm)
Gross Static Mass.....	5,009.9 lbs (2,272.5 kg)				Floorpan/Transmission Tunnel

Figure 2 Summary of Test 3-33

MASH 2016 Test 3-34 Summary

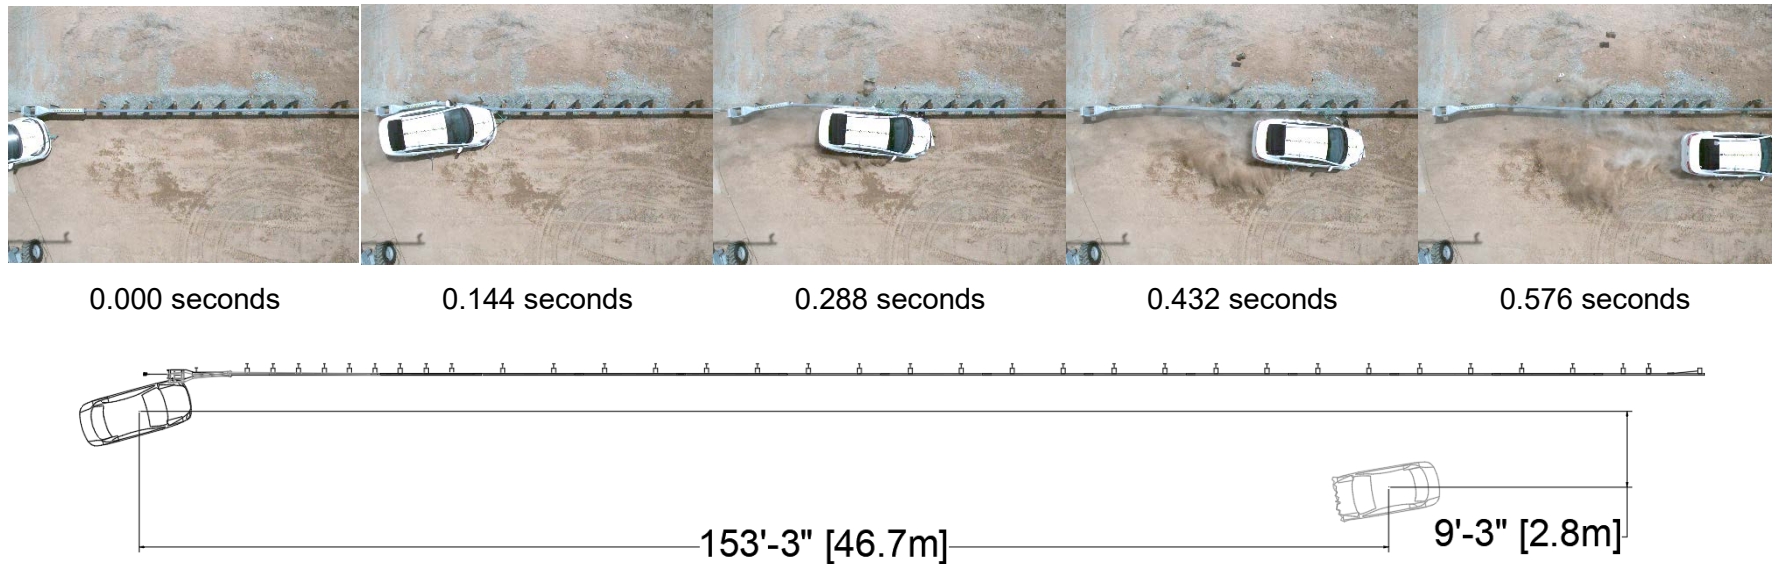


GENERAL INFORMATION	
Test Agency.....	Applus IDIADA KARCO
Test Number.....	P42158-01
Test Designation.....	3-34
Test Date.....	7/22/22
TEST ARTICLE	
Name / Model.....	Next Generation Terminal (NGT™)
Type.....	Terminal
Installation Length.....	187.5 ft. (57.2 m)
Terminal Length.....	37.5 ft. (11.4 m)
Road Surface.....	Smooth Concrete to Fine Silty Soil
TEST VEHICLE	
Type / Designation.....	1100C
Year, Make, and Model....	2016 Kia Rio
Curb Mass.....	1,145.0 lbs (2,524.3 kg)
Test Inertial Mass.....	2,429.5 lbs (1,102.0 kg)
Gross Static Mass.....	2,630.1 lbs (1,193.0 kg)

Impact Conditions	
Impact Velocity.....	60.84 mph (97.91 km/h)
Impact Angle.....	15.4°
Location / Orientation.....	7.5 in. (191 mm) Upstream from CIP
Impact Severity.....	21.2 kip-feet (28.8 Kilojoules)
Minimum IS Required....	19.0 kip-feet (26.0 Kilojoules)
Exit Conditions	
Exit Velocity.....	59.56 mph (95.85 km/h)
Exit Angle.....	-5.6°
Final Vehicle Position.....	153.3 ft. (46.7 m) Downstream 9.3 ft. (2.8 m) Impact Side
Vehicle Snagging.....	Satisfactory
Vehicle Pocketing.....	Satisfactory
Vehicle Stability.....	Satisfactory
Maximum Roll Angle.....	-4.7°
Maximum Pitch Angle.....	7.5°
Maximum Yaw Angle.....	-61.9°

Occupant Risk	
Longitudinal OIV.....	10.8 ft/s (3.3 m/s)
Lateral OIV.....	-18.0 ft/s (-5.5 m/s)
Longitudinal RA.....	-8.3 g
Lateral RA.....	6.4 g
THIV.....	20.0 ft/s (6.1 m/s)
PHD.....	9.7 g
ASI.....	0.72
Test Article Deflections	
Static.....	0.5 ft. (0.2 m)
Dynamic.....	0.9 ft. (0.3 m)
Working Width.....	1.2 ft. (0.4 m)
Debris Field.....	37.5 ft. (11.4 m) Longitudinally 29.8 ft. (9.1 m) Laterally
Vehicle Damage	
Vehicle Damage Scale.....	12-FR-3
CDC.....	12-FLES6
Maximum Deformation....	MASH Deformation Limits Not Exceeded (0.0 in.) 0 mm

Figure 2 Summary of Test 3-34

MASH 2016 Test 3-35 Summary

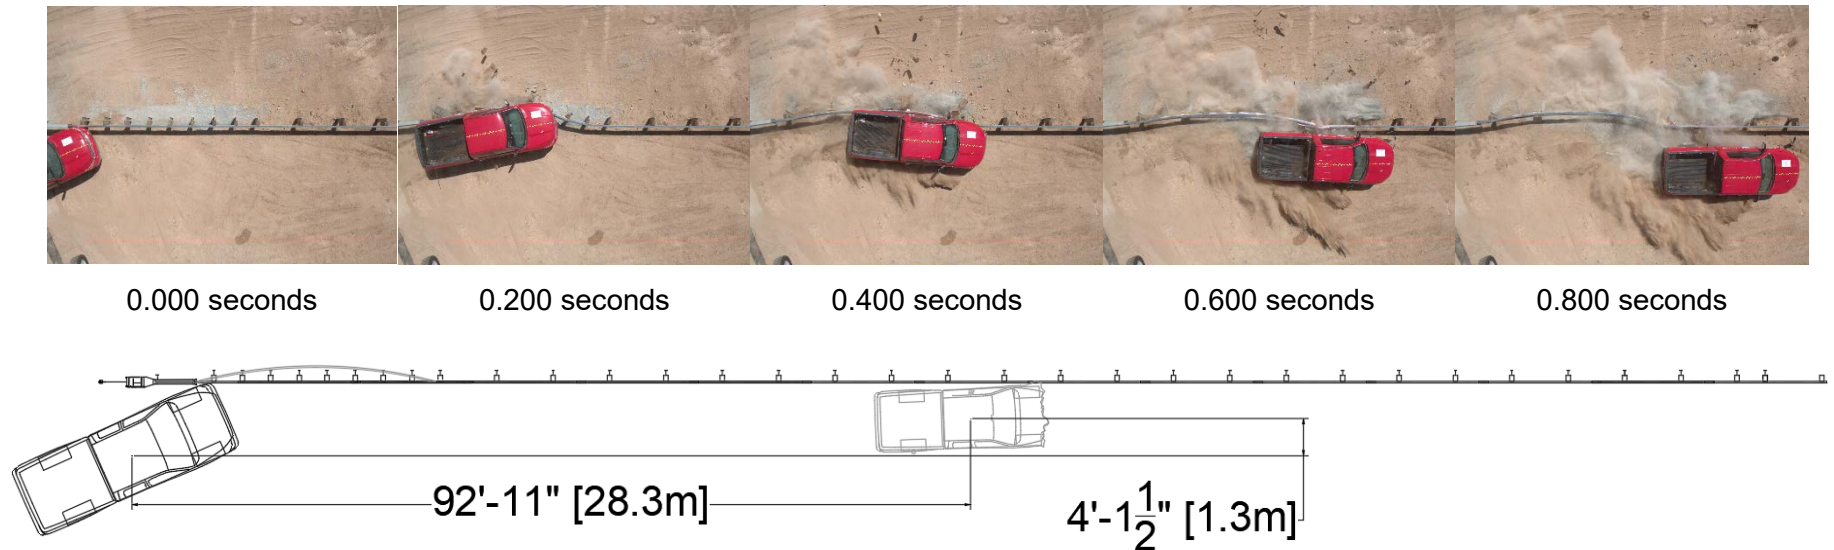


GENERAL INFORMATION		Impact Conditions		Occupant Risk	
Test Agency.....	Applus IDIADA KARCO	Impact Velocity.....	61.45 mph (98.89 km/h)	Longitudinal OIV.....	-10.2 ft/s (-3.1 m/s)
Test Number.....	P42095-01	Impact Angle.....	26.4°	Lateral OIV.....	18.0 ft/s (5.5 m/s)
Test Designation.....	3-35	Location / Orientation.....	7.5 in. (190 mm) Upstream from Post 2	Longitudinal RA.....	-5.8 g
Test Date.....	5/3/22	Impact Severity.....	125.4 kip-feet (170.0 Kilojoules)	Lateral RA.....	-12.2 g
		Minimum IS Required.....	106.0 kip-feet (144.0 kilojoules)	THIV.....	20.0 ft/s (6.1 m/s)
TEST ARTICLE		Exit Conditions		PHD.....	12.4 g
Name / Model.....	Next Generation Terminal (NGT™)	Exit Velocity.....	26.2 mph (42.2 km/h)	ASI.....	0.75
Type.....	Terminal	Exit Angle.....	2.7°	Test Article Deflections	
Installation Length.....	187.5 ft. (57.2 m)	Final Vehicle Position.....	92.9 ft. (28.3 m) Downstream 4.1 ft. (1.3 m) Impact side	Static.....	1.9 ft. (0.6 m)
Terminal Length.....	37.5 ft. (11.4 m)	Vehicle Snagging.....	Satisfactory	Dynamic.....	2.5 ft. (0.7 m)
Road Surface.....	Smooth Concrete to Fine Silty Soil	Vehicle Pocketing.....	Satisfactory	Working Width.....	2.9 ft. (0.9 m)
		Vehicle Stability.....	Satisfactory	Debris Field.....	108.6 ft. (33.1 m) Longitudinally 40.6 ft. (12.4 m) Laterally
TEST VEHICLE		Maximum Roll Angle.....	-12.3°	Vehicle Damage	
Type / Designation.....	2270P	Maximum Pitch Angle.....	-8.1°	Vehicle Damage Scale.....	12-LFQ-2
Year, Make, and Model....	2016 Ram 1500	Maximum Yaw Angle.....	30.4°	CDC.....	12FLEN5
Curb Mass.....	4,985.7 lbs (2,261.5 kg)			Maximum Deformation....	MASH Deformation Limits Not Exceeded (0.0 in.) 0.0 mm
Test Inertial Mass.....	5,025.4 lbs (2,279.5 kg)				
Gross Static Mass.....	5,025.4 lbs (2,279.5 kg)				

Figure 2 Summary of Test 3-35

2


1

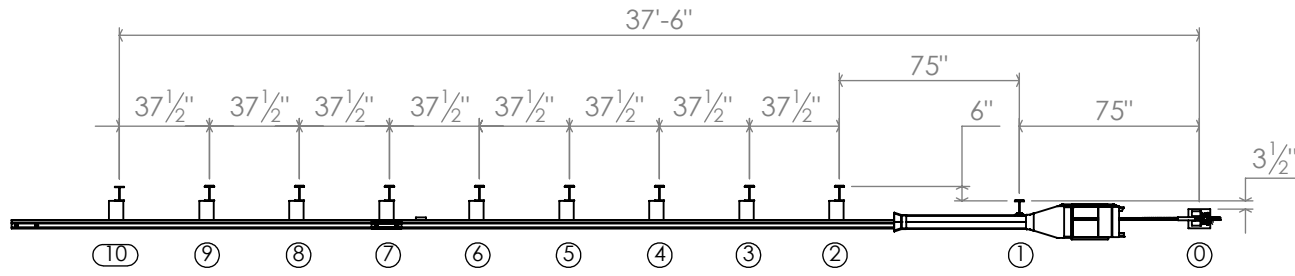

ITEM	QTY	BILL OF MATERIALS
A	1	IMPACT HEAD
B	1	FIRST PANEL
C	1	ANCHOR POST
D	1	NGT FIRST POST
E	8	NGT POST
F	1	MG5 12.5" RAIL
G	1	W6x9 POST
H	2	NOTCHED BLOCKOUT
J	1	SHELF BRACKET
K	1	ANCHOR CAP
a	1	1" Hex Nut
b	1	1" Washer
c	8	5/8" x 1 1/4" SPLICE BOLT
d	8	5/8" SPLICE NUT
e	2	1/2"x1.5" HEX BOLT GR 5
f	4	1/2" WASHERS
g	2	1/2" HEX NUT
h	2	7/16"x1.5" HEX BOLT GR 5
j	4	7/16" WASHER
k	2	7/16" HEX NUT
l	1	5/16"x1" HEX BOLT GR 5
m	2	5/16" WASHER
n	1	5/16" HEX NUT

B

B

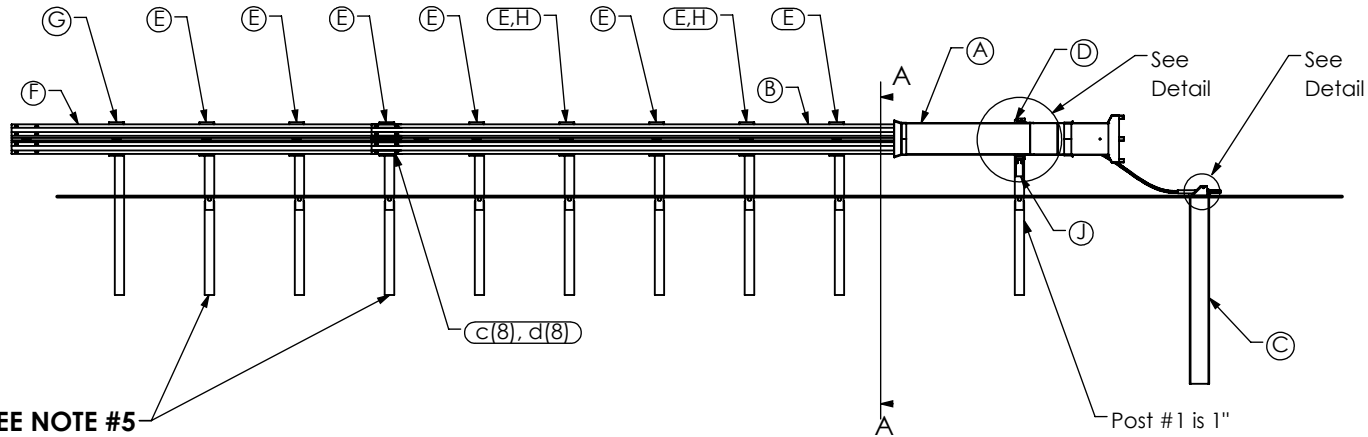


SEE NOTE #5

Post #1 is 1" higher than posts 2-9


A

A




SEE NOTE #6

Post #0
Anchor Post
SCALE 1 : 10

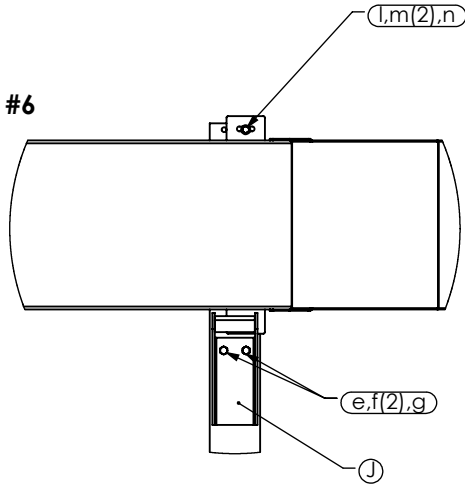

Section A-A
Post 2

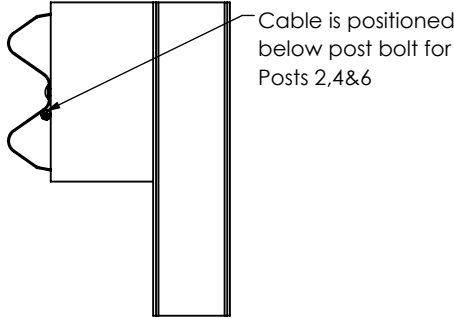

Cable is positioned below post bolt for Posts 2,4&6

GENERAL NOTES

1. Cable is positioned below the post bolt at posts 2,4&6 prior to fastening the guardrail to the post.
2. Notched blockouts should be installed on posts 3&5 so that cutout faces traffic. No rail is attached to these posts. Cable buttons at posts 3 & 5 will nest within the cutout of the notched blockouts.
3. The base plate of the Anchor Post (post 0) should be flush with the ground.
4. Posts 2-9 should be installed so that slots face away from the terminal head.
5. Post bolts do not pass through the guardrail at Post 7 & 9.
6. Anchor nut is torqued to 120 lb-ft.

TITLE: Next Generation Terminal (NGT)		
SCALE: 1:200	10/19/2022	Sheet 1 of 1

2

1